


Follow the Tree Protection Zone!

Tree Protection Guidelines for Construction

Tree protections shall be in place prior to any construction equipment or materials being on site. Fencing shall remain in place until construction equipment, materials, and debris have been removed from the site and approval from the City Landscape Architect has been given for removal.

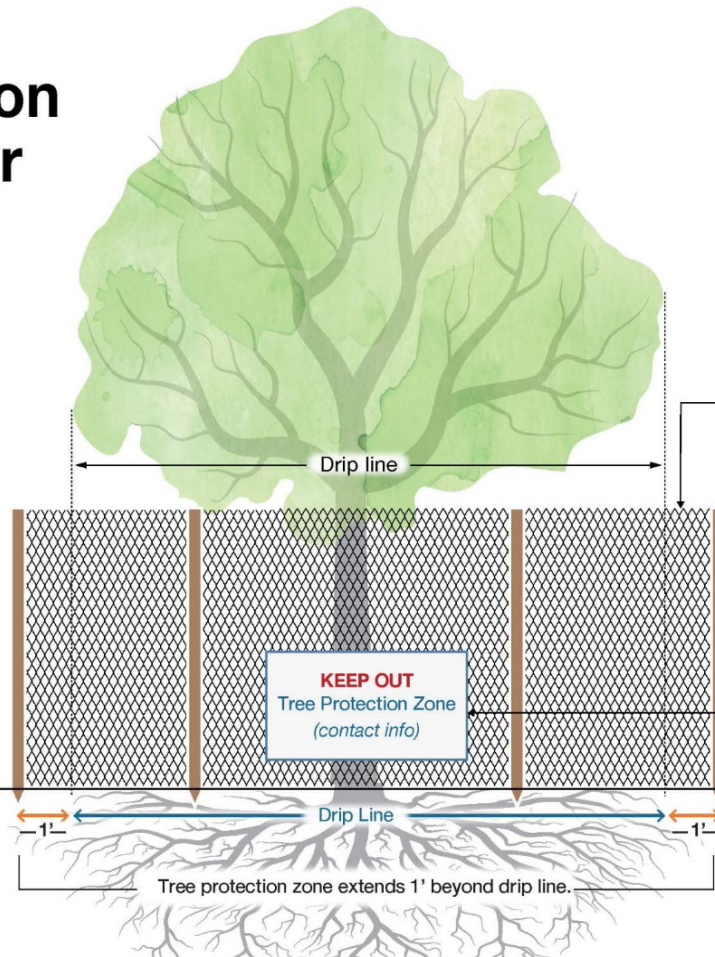


A substantial construction fence, such as a non-movable chain link fence, must be placed around the Tree Protection Zone of each Protected Tree.

No vehicles, construction equipment, material, debris, paint or paint products, pallets, chemicals, contaminated water or other foreign material shall be allowed to be placed, poured, piled, pushed, or stored within the Tree Protection Zone of any tree.

Laminated sign with contact info.

URBAN TREE FOUNDATION
ADAPTED BY DUDEK



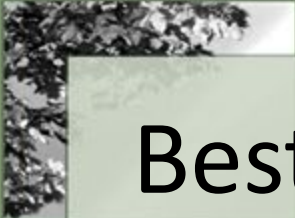

Best Construction Tree Protection Practices

- Install the Tree Protection Zone (TPZ) Fencing
- Ask Arborist for inspection before starting and before demolition
- Share the TPZ Plan with all subcontractors
- Store soil and materials OUTSIDE the TPZ
- Avoid grade changes within or near the TPZ
- Protect the tree root zone, the trunk and the canopy from damage
- No parking or storage of soil or materials under the TPZ
- No cleanout of painting, concrete, stucco or other chemicals in the TPZ
- Have arborist present for any trenching, use air spade, protecting small roots.
- ENFORCE the TPZ restrictions with all subcontractors!

Trees provide oxygen, shade, habitat and cool a home and community by 10 degrees or more!

You can help us save Altadena's trees!

www.altadenagreen.org

